

Nivotemp 61-1-TKÖ-..RD-M12-VA

- Renault specification -

Technical Data

Operating pressure max. 1 bar
 Operating temperature max. 80 °C
 Spec. gravity of float min. 0.8 kg/dm³

Material

Float SK 221 1.4571
 Switch tube 1.4571
 Flange PA
 Stilling tube 1.4571

Level contacts

K10
 Function NO
 Min. distance of contact 40 mm
 Max. Voltage 24 V
 Max. current 1.0 A
 Contact load 10 VA

Temperature contacts

Max. voltage 24 V
 Max. current 2.5 A
 Contact load 100 VA
 Hysteresis 10K ± 3K
 Switch point TKÖ-70 = 70 °C NC



Connector

male plug M12 x 1 (4 pol.)
 female plug not in
 scope of delivery

Protection class IP67 (with female plug fixed)

Wiring diagram

All figures at empty reservoir

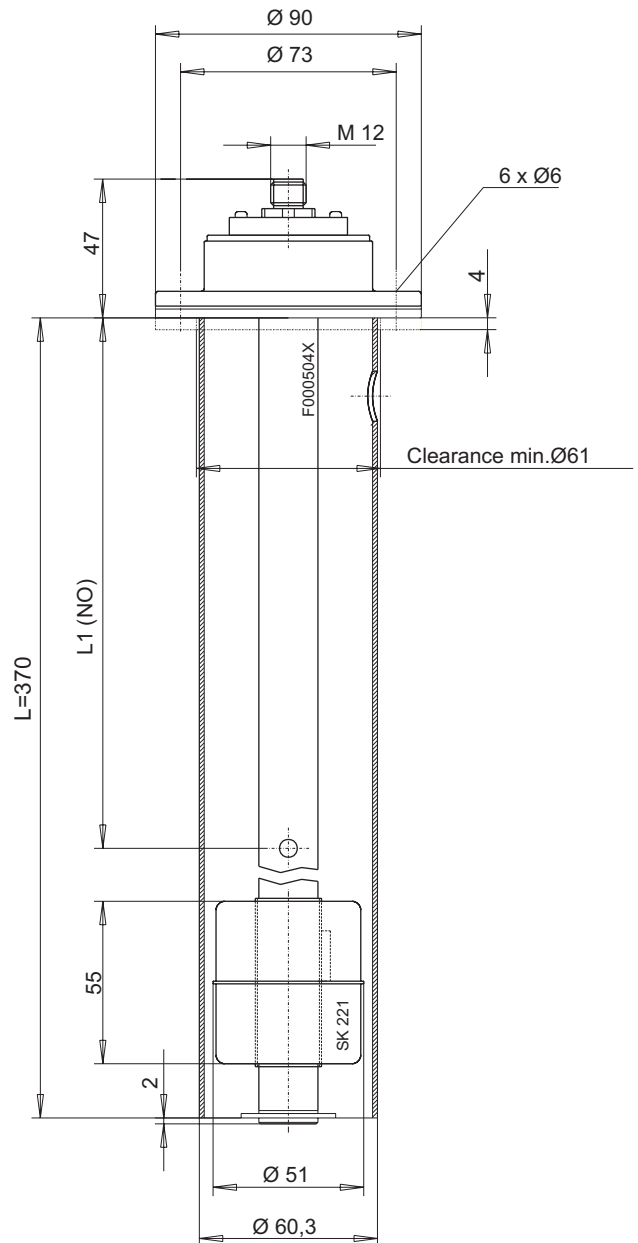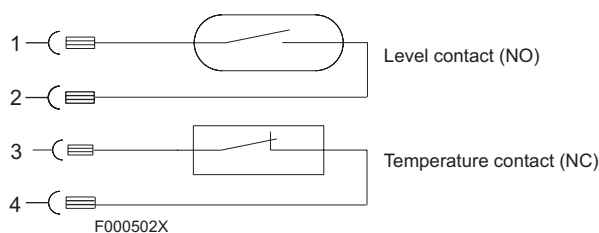

Order Information

Type	Part No.	L	L1	Temperature
61-1-TKÖ-70RD-M12-VA1	10213099	370 mm	200 mm NO	70 °C NC
61-1-TKÖ-70RD-M12-VA2	10213199	370 mm	300 mm NO	70 °C NC

Accessories

Part No. 9144050018 Connecting cable M12x1 with 1 x 5 pole M12 plug cable length: 3.0 m

we reserve the right to amend specifications

