

# Nivotemp 61-1-TKÖ-..RD-M3-VA

- PSA Peugeot Specification -

## Technical Data

Operating pressure max. 1 bar  
 Operating temperature max. 80 °C  
 Spec. gravity of float min. 0.8 kg/dm<sup>3</sup>

### Material

Float SK 221 1.4571  
 Switch tube 1.4571  
 Flange PA  
 Stilling tube 1.4571

### Level contacts

K10  
 Function NO  
 Min. distance of contact 40 mm  
 Max. Voltage 230 V  
 Max. current 1.0 A  
 Contact load 10 VA

### Temperature contacts



Max. voltage 230 V  
 Max. current 2.5 A  
 Contact load 100 VA  
 Hysteresis 10 K ± 3 K  
 Switch point TKÖ-70 = 70 °C NC

### Connector

M3 ( 3-pol. + PE)  
 Protection class IP 65

## Wiring diagram

All figures at empty reservoir

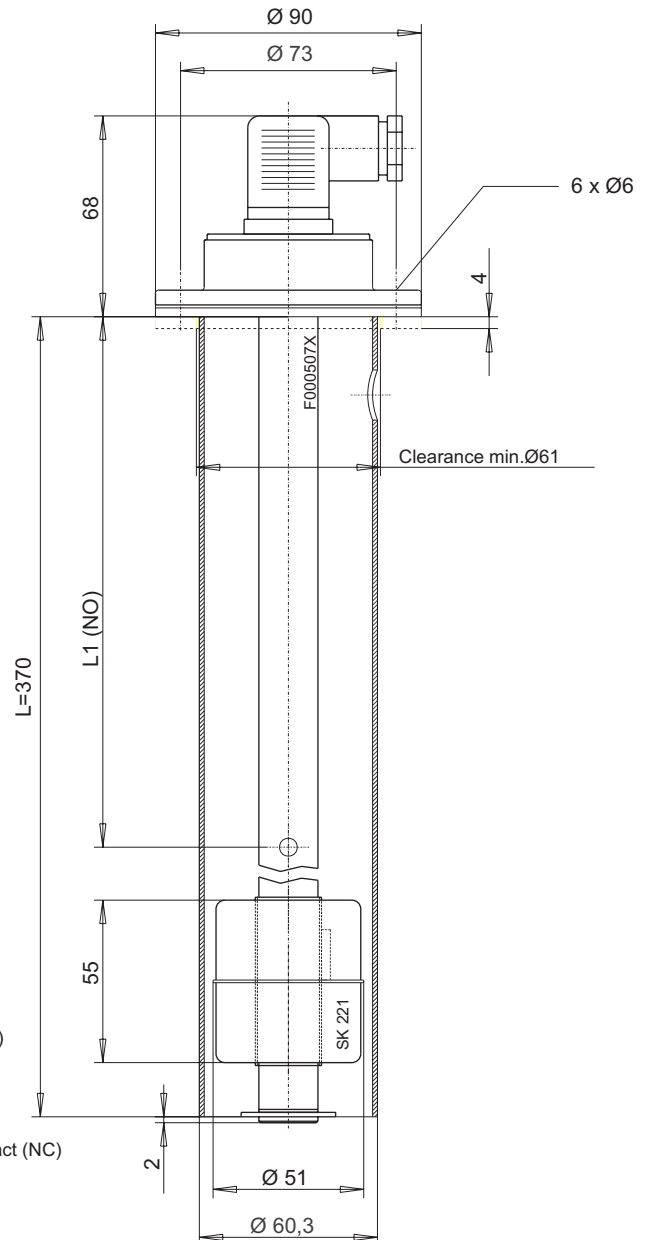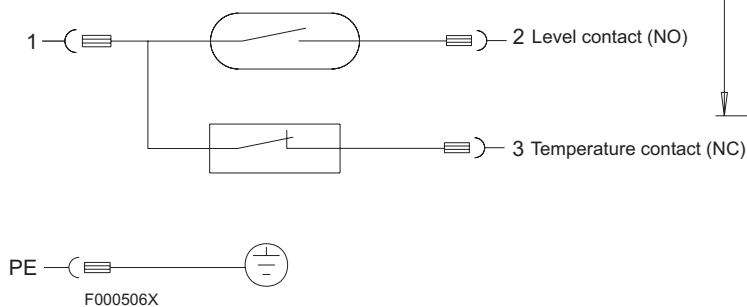

## Order Information

Type	Part No.	L	L1	Temperature
61-1-TKÖ-70RD-M3-VA1	10208999	370 mm	200 mm NO	70 °C NC
61-1-TKÖ-70RD-M3-VA2	10218999	370 mm	300 mm NO	70 °C NC

we reserve the right to amend specifications

